






# Actuator, Klappenstellantrieb, Электропривод, Servophon


DA04...



**LUFBERG**  
CONSTRUCTIVE DECISIONS

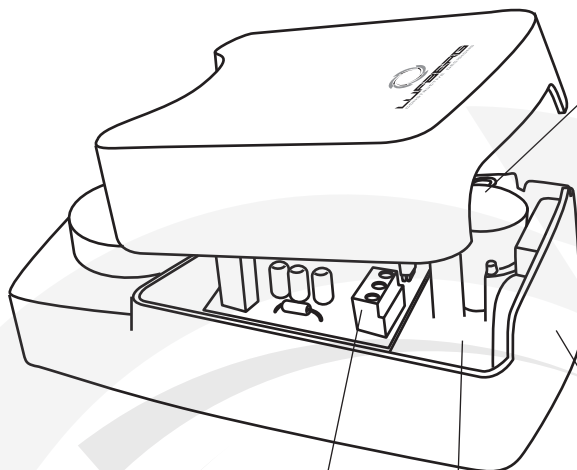




DA04N24S  
DA04N220S  
DA04N24PIS,  
DA04N220PIS





a = 10°  
b = 80°



a: 0° ~ 90°  
b: 0° ~ 90°



DA04N24PI, DA04N24PIS, DA04N220PI, DA04N220PIS

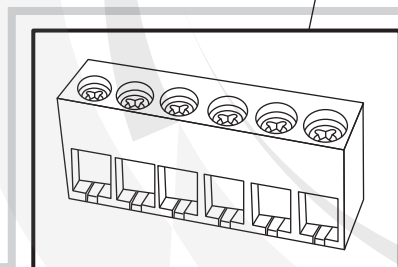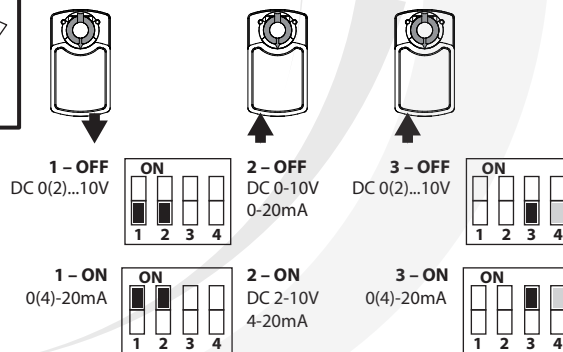

DA04N24, DA04N24S  
DA04N220, DA04N220S

DA04N24PI,  
DA04N24PIS

DA04N220PI,  
DA04N220PIS

DA04N24S, DA04N220S,  
DA04N24PIS, DA04N220PIS



1 2 3  
⊥ ~ 24 V AC ± 10 %  
- + 24 V DC ± 10 %  
N L1 230 V AC ± 10 %




1 2 3  
⊥ ~  
- +  
N L1




1 2 3 4  
⊥ ~ 24 V AC ± 10 % Y1 U  
- + 24 V DC ± 10 %  
0(2)...10V/0(4)...20mA  
0(2)...10V/0(4)...20mA



1 2 3 4 5  
⊥ N L1 ⊥ Y1 U  
AC230V±10%  
DC 0(2)...10V  
0(4)...20mA  
DC 0(2)...10V  
0(4)...20mA



21 22 23 24 25 26  
3 (1,5) A / 250 V



All rights reserved.  
The company Lufberg reserves the right to change technical specifications of product without previous announcement.  
On these product was issued Declaration of conformity in accordance with those directives: the Low Voltage Directive 2006/95/EC, the Electromagnetic Compatibility Directive 2004/108/EC and Machinery Directive 2006/42/EC

DA04...

